

Sixteen Port Splitter for MiniGoose


When you need 16 remote sensors on a MiniGoose, this rack mounted unit holds 16 splitters and the MiniGoose itself.

The MiniGoose Climate Monitor can have up to sixteen remote sensors not including the internal temperature and humidity sensors. To add additional sensors, a user had to add telephone-type line splitters which normally had five jacks.

With this rack-mounted splitter, the user can directly plug in up to sixteen sensors, which is the maximum for the MiniGoose. The MiniGoose is not included.



The sixteen port splitter is rack-mounted. The MiniGoose climate monitor installs on the back of the metal enclosure as shown in the bottom photo.

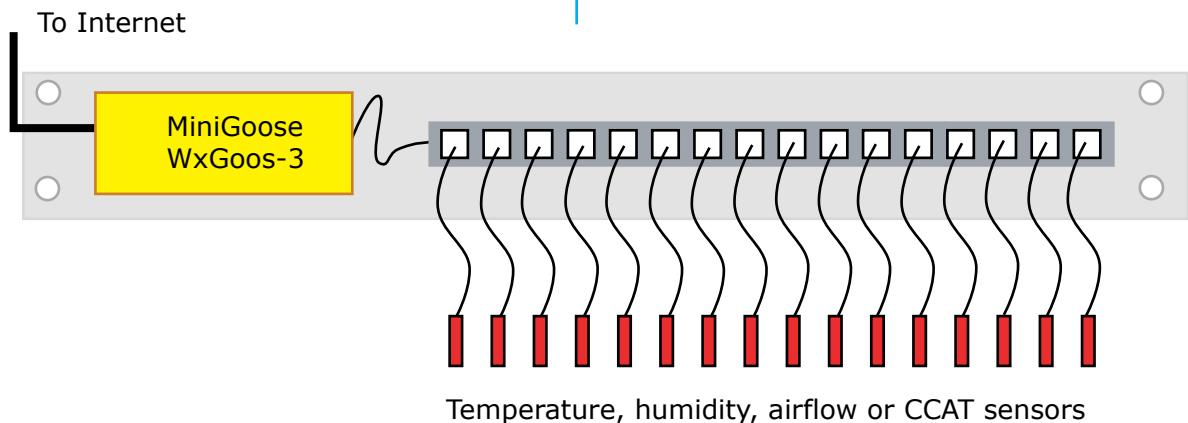

The remote temperature sensors can have an aggregate cable length of 600'. The connectors are RJ-12 receptacles. The MiniGoose is not included. A screwdriver is required to assemble the unit.

Specifications

Sensors: any ITW sensor using the Dallas 1-wire connection. Temperature, humidity, air flow, door closure, current and others are available.

Connectors: RJ-12, sixteen

Mounting: 1-U rack metal mount, black wrinkle paint.

Model code: SPL-16

ITWatchDogs.com



512-257-1462